



People  
1-11

Capacity  
40 - 400 L

Models  
Indoor & Outdoor



# EVERHOT

powered by Rheem



Corrosion Proof



High Recovery Rate



Safety Valve

## THE ULTIMATE HOT WATER SOLUTION

Domestic


# ELECTRIC STORAGE HOT WATER HEATERS

**EVERHOT**


# TECHNICAL SPECIFICATION

Extra  
**50mm**  
Thick on  
Insulating Layer

Maintain  
**50°~70°C**  
Constant  
Temperature

  
**Sacrificial Anode**  
Longer Life Span

  
**Polyurethane  
Insulation**  
Keeps The Water Hotter

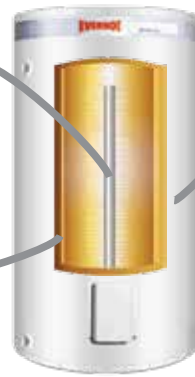


Resist Dirt and  
Corrosion Proof  
  
Inner Layer Tank  
**Everglas Vitreous  
Enamel Lining**  
Outer Layer Tank  
**Colorbond Steel  
Jacket**

Isolated Tank  
Design  
**High Hot**  
Efficiency

Reach  
**90%**  
Hot Water  
Production Rate

SIZING GUIDE	
No. of People	Model
1 - 2	40 litre
1 - 3	60 litre
2 - 3	90 litre
3 - 4	120 litre
4 - 5	150 litre
5 - 6	195 litre
6 - 7	245 litre
7 - 8	270 litre
8 - 9	320 - 340 litre
9 - 11	400 litre

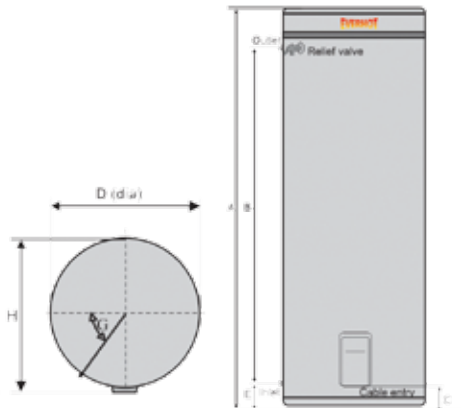

MODELS NAME		ERAS04003G	ERAS06003G	ERAS09003G	ERAS12003	ERAS15003	ERAS19503	ERAS24507	ERAS27007	ERAS32007	ERAS40007	
Install Location	Floor Standing upright	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Rating capability	litres	40	60	90	120	150	195	245	270	320	400	
DIMENSIONS	A	mm	454	614	864	1114	1364	1714	1409	1482	1759	1900
	B	mm	220	380	630	880	1130	1480	1130	1318	1480	1708
	C	mm	114	114	114	114	114	114	145	145	145	100
	D	mm	458	458	458	458	458	458	569	569	569	610
	E	mm	68	68	68	68	68	68	68	68	68	88
	G	°C	22°	22°	22°	22°	22°	22°	29°	29°	29°	29°
	H	mm	492	492	492	492	492	492	603	603	603	644
	Net weight	kg	22	27	34	42	49	58.5	65.5	70	79	102
Heating Element Power rating	kW	1.2 ; 1.5 ; 2.4 ; 3.6 ; 4.8 ( 220 V - 50 Hz )										
T & PR setting pressure	Mpa	0.85										
Max. water supply pressure	Mpa	0.68										
Adjustable water temp. range	°C	30 °C ~ 70 °C										
T & PR connection dimension		RP 3/4 / 20										
Cold / hot water connection dimension		RP 3/4 / 20										

Your Everhot distributor is :